


Pomona®

**Model 4290
Adapter, SMA Male To BNC Female**

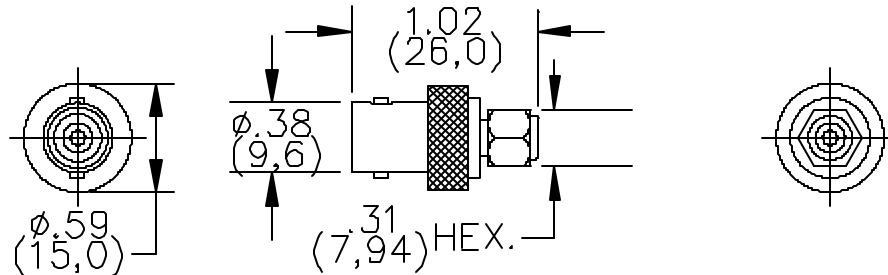

MATERIALS:

Body – Gold Plated Beryllium Copper, Male Contact – Gold Plated Brass, Female Contact – Gold Plated Beryllium Copper

Dielectric: Teflon per L-P-403

Finish: Body and Contacts – Gold Plated per MIL-G-45204, Type II, Class 2

Marking: “Pomona 4290”

RATINGS:

Voltage: Shield/Earth: 30VAC/60VDC Max.

Inner Contuictor/Shield: 335VRMS Max.

Operating Temperature: -65°C (-85°F) to +165°C (+329°F)

Nominal Impedance: 50 Ohms

Frequency Range: 0-12.4 GHz.

ORDERING INFORMATION: Model 4290

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Test Equipment Depot - 800.517.8431 - 99 Washington Street Melrose, MA 02176

FAX 781.665.0780 - TestEquipmentDepot.com